




Optics



*Eliptyczna optyka uzyskiwana jest przez użycia akcesoriów

*Elliptical optics are obtained by installing the specific accessory



Ø 100


Ø 125

Ø 145


Ø 175




Source	W	lm	Optic	Code
Ø100				
3000K - CRI 80				
COB	10W	700	70°	8899 333
4000K - CRI 80				
COB	10W	750	70°	8899 333
6000K - CRI 80				
COB	10W	810	70°	8899 333




Source	W	lm	Optic	Code
Ø125				
3000K - CRI 80				
COB	20W	1270	70°	8899 334
4000K - CRI 80				
COB	20W	1370	70°	8899 334
6000K - CRI 80				
COB	20W	1470	70°	8899 334



Source	W	lm	Optic	Code
Ø145				
3000K - CRI 80				
COB	30W	1530	80°	8899 335
4000K - CRI 80				
COB	30W	1660	80°	8899 335
6000K - CRI 80				
COB	30W	1790	80°	8899 335




Source	W	lm	Optic	Code
Ø175				
3000K - CRI 80				
COB	40W	2610	80°	8899 336
4000K - CRI 80				
COB	40W	2810	80°	8899 336
6000K - CRI 80				
COB	40W	3030	80°	8899 336




Krzywe rozłożenia światła / Light distribution curves


10W - 70°

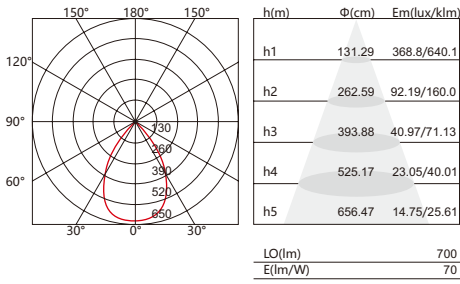

20W - 70°

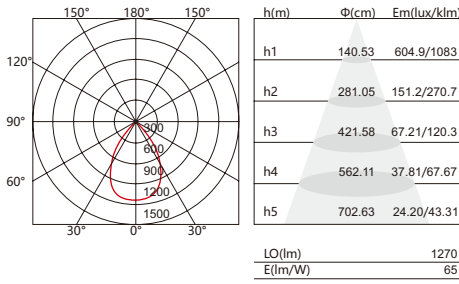

30W - 80°

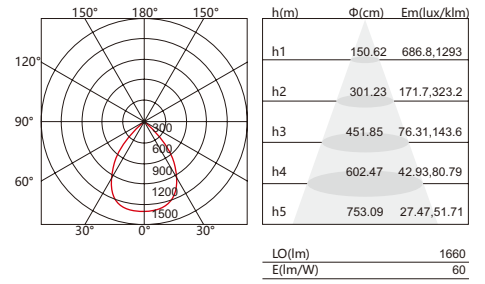

40W - 80°

