





Optyka / Optics



*Eliptyczna optyka uzyskiwana jest przez użycia akcesoriów


*Elliptical optics are obtained by installing the specific accessory




Source	W	lm	Optic	Code
Ø75				
3000K-CRI 80				
COB	7W	520	50°	8885 325
4000K-CRI 80				
COB	7W	560	50°	8885 325
6000K-CRI 80				
COB	7W	600	50°	8885 325




Source	W	lm	Optic	Code
Ø95				
3000K-CRI 80				
COB	10W	810	40°	8885 303
4000K-CRI 80				
COB	10W	880	40°	8885 303
6000K-CRI 80				
COB	10W	950	40°	8885 303



Source	W	lm	Optic	Code
Ø120				
3000K-CRI 80				
COB	20W	1610	40°	8885 304
4000K-CRI 80				
COB	20W	1740	40°	8885 304
6000K-CRI 80				
COB	20W	1880	40°	8885 304




Source	W	lm	Optic	Code
Ø180				
3000K-CRI 80				
COB	30W	1920	50°	8885 306
4000K-CRI 80				
COB	30W	2080	50°	8885 306
6000K-CRI 80				
COB	30W	2250	50°	8885 306




Source	W	lm	Optic	Code
Ø200				
3000K- CRI 80				
COB	40W	3420	40°	8885 308
4000K- CRI 80				
COB	40W	3690	40°	8885 308
6000K- CRI 80				
COB	40W	3980	40°	8885 308

Light distribution curves


7W - 50°

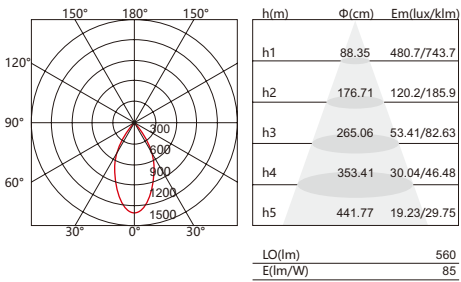


10W - 40°

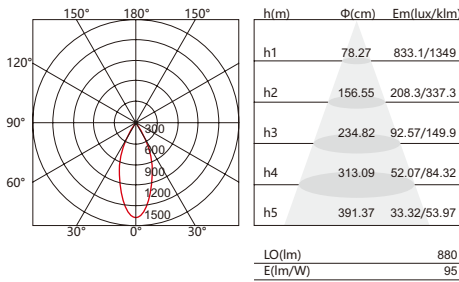

20W - 40°

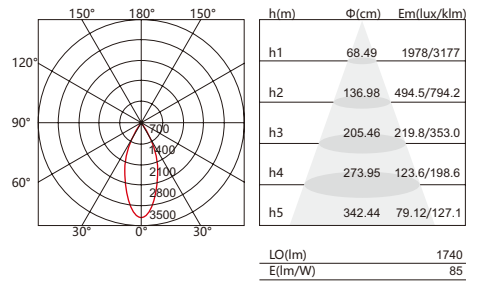

30W - 50°

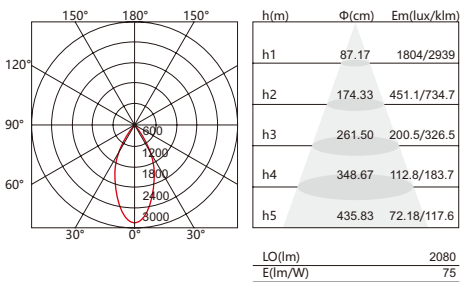

40W - 40°

