


Optyka / Optics



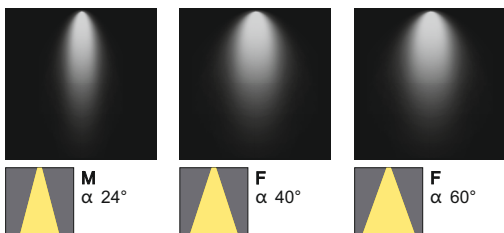

Ø 125

Ø 140


Ø 160

Ø 200


Ø 260




Source	W	lm	Optic
Ø125			
3000K-CRI 80			
COB	20W	1685	24° / 40° / 60°
4000K-CRI 80			
COB	20W	1620	24° / 40° / 60°
6000K-CRI 80			
COB	20W	1910	24° / 40° / 60°



Source	W	lm	Optic
Ø140			
3000K-CRI 80			
COB	30W	2580	24° / 40° / 60°
4000K-CRI 80			
COB	30W	2790	24° / 40° / 60°
6000K-CRI 80			
COB	30W	2930	24° / 40° / 60°




Source	W	lm	Optic
Ø160			
3000K-CRI 80			
COB	40W	3520	24° / 40° / 60°
4000K-CRI 80			
COB	40W	3800	24° / 40° / 60°
6000K-CRI 80			
COB	40W	3990	24° / 40° / 60°



Source	W	lm	Optic
Ø200			
3000K-CRI 80			
COB	50W	4730	24° / 40° / 60°
4000K-CRI 80			
COB	50W	5110	24° / 40° / 60°
6000K-CRI 80			
COB	50W	5360	24° / 40° / 60°


Umpri




Source	W	lm	Optic
Ø260			
3000K-CRI 80			
COB	70W	5980	24° / 40° / 60°
4000K-CRI 80			
COB	70W	6480	24° / 40° / 60°
6000K-CRI 80			
COB	70W	6780	24° / 40° / 60°

Krzywe rozłożenia światła / Light distribution curves


20W - 60°

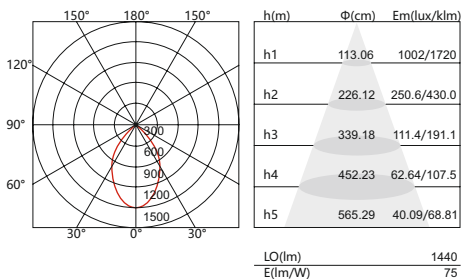


30W - 60°

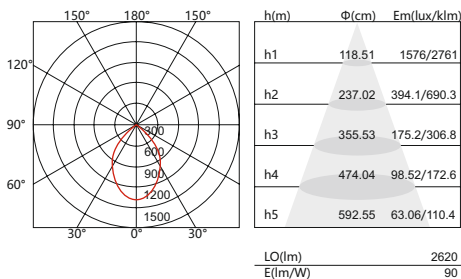

40W - 60°

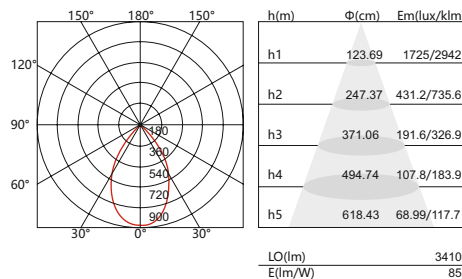

50W - 24°

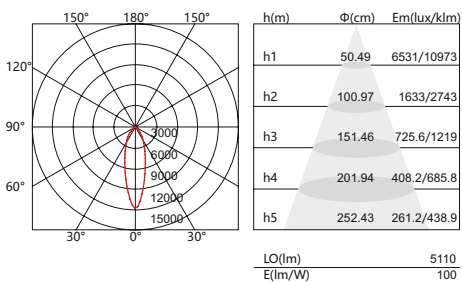

70W - 60°

